

## A5 ERROR - SOLUTION GUIDE



Welcome to the future of hot water.


DYNAMIC - SS/X8/OP

DYNAMIC - SS/X8/C

## A5 SOLUTION GUIDE

An A5 error is caused by an oversensitivity in the pressure switch which is a safety precaution for cold climates. Changing these settings will not affect the performance of the unit.

1. Hold down 'MODE' until the word 'PASS' appears on the display. This requires you to enter the password. The password for each machine is 4-3-2-1.

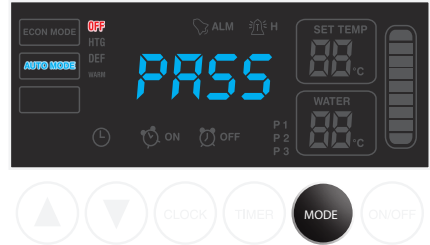


2. Press 'UP ARROW' to change 'PASS' to '0000'. To enter the password, adjust each number using the 'ARROW' buttons and select 'TIMER' to confirm. When the password has been correctly entered, press 'TIMER'. 'F11' will appear on the display.




3. Press the 'UP ARROW' until you arrive at F50, press 'TIMER' and a number will appear on the screen. Using the 'DOWN ARROW' change the value to "0". Press 'TIMER' to exit.



4 Repeat step 3 for F54 and F57.

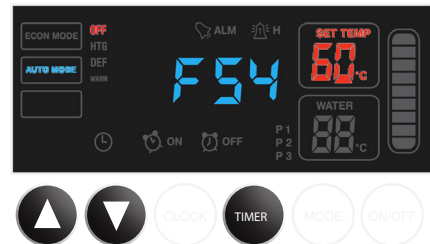

5. To exit settings press 'UP ARROW' until 'END' appears on the screen, then press 'TIMER'. The clock will reappear on the screen. Ensure system is on.

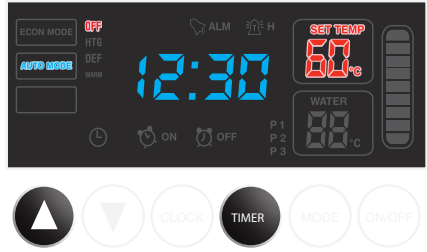



[info@hydrothermhotwatersystems.com.au](mailto:info@hydrothermhotwatersystems.com.au)

[www.hydrothermhotwatersystems.com.au](http://www.hydrothermhotwatersystems.com.au)

**TOLL-FREE 1300 769 904**